

Version : 11/2024

product description

		Herringbone	XL	XXL long
Bevel	-	4	2	2
Oak layer thickness (+0/-0,1)	mm	0,6		
Residential use guarantee	-	20 years		
Class of use	ISO 10874	23 (heavy domestic use) 33 (heavy commercial use)		
Total thickness	mm	9,5	10	10
Total weight	kg / m ²	8,5	8,5	8,5
Format	mm	84 x 504	185 x 1190	210 x 2200
Pack content	-	20 planks (6.32 kg, 0.847 m ²)	10 planks (19.52 kg, 2.202 m ²)	6 planks (25.02 kg, 2.772 m ²)
Pallet content	-	48 packs	40 packs	40 packs
Pallet size (h x w x l)	mm	694 x 815 x 1200	1150 x 850 x 1205	750 x 960 x 2220


tests results

Moisture level	-	7 - 10%	
Installation system	-	OmniLoc A & B	BestLoc X-Treme
Surface treatment	-	Ultimtec high performance varnish	
Resistance to abrasion	XP B 53-669	> 15 000 rev. (TT CS10)	
Gloss level	Gloss 60	5+/-2 (matt)	
Compatibility with underfloor heating	-	Compatible with electric radiant floor heating (max 90 W/m²) and low-temperature hot water heating system (see conditions)	
Thermal resistance	m² K/W	0,055	0,052
Fire resistance	EN 13501-1 (oak)	Cfl-s1	
CE marking	EN 14342	CE	
Formaldehyde emissions	EN 717-1	E1	
VOC emissions	ISO 16000-9	M1 / A	M1 / A+
Envrionmental programme	Certification	PEFC/07-31-229	PEFC/10-31-1047






Version : 11/2024

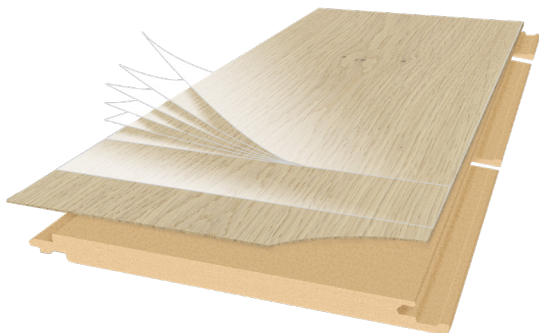

parqwood xl & xxl long

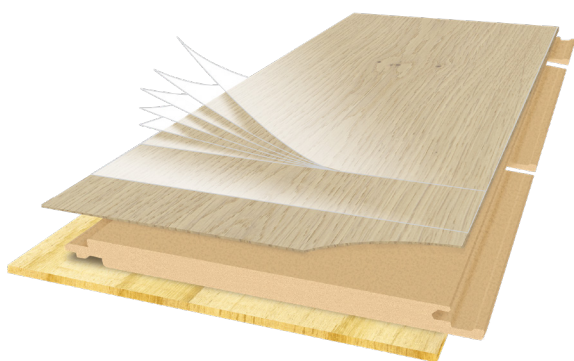

parqwood herringbone

strong wood floors.